SKYAUDIT — EVIDENCE BRIEF

PROJECT: Delhi-Mumbai Expressway (NHAI Package 1 • Sohna-Kolgaon) • **LOCATION:** Sohna-Nuh Corridor, Haryana • **CORRIDOR:** 18.4 km

DATE: 2026-10-08
REF: AUD-DELHI-MUMBAI
STATUS: LOCAL-FIRST / CDSE VERIFIED

OBSERVABLE PROGRESS	EVIDENCE CONFIDENCE	SCHEDULE CONSISTENCY	POTENTIAL DISCREPANCY
41.6%	**91% (HIGH)**	**HIGH**	**NONE IDENTIFIED**
Multispectral Surface Signal	0.0% Cloud • 10m L2A	T0 → T1 → T2 Aligned	Consistent with Evidence


1. PROJECT CLAIM vs. SATELLITE EVIDENCE TIMELINE

Phase	Date	Corridor NDVI	Physical Observation Finding
T0 — Pre-construction baseline	2019-04-30	0.187	Undisturbed natural terrain, greenfield Right-of-Way
T1 — Construction-stage observation	2021-03-20	0.262	Substantial ground disturbance, earthworks & embankment grading
T2 — Post-construction observation	2023-03-10	0.346	Strong continuous surface-change signal along observed corridor

2. OBSERVABLE PROGRESS MATHEMATICAL DERIVATION

Component Signal	Raw Score	Weight	Contribution	Spectral / Physical Evidence Basis
Vegetation Clearance	0.35	15%	+5.2%	Corridor NDVI drop between T0 and T1 greenfield clearing
Surface Disturbance (BSI)	0.40	25%	+10.0%	Bare Soil Index shift from grading & embankment formation
Corridor Continuity	0.40	20%	+8.0%	19.6% corridor chainage exhibiting verified spectral disturbance
Built / Paved Surface Signal	0.30	25%	+7.5%	High surface reflectance shift consistent with subbase & surfacing
Temporal Consistency	0.72	15%	+10.8%	Monotonic progression verified sequentially across T0 → T1 → T2
TOTAL OBSERVABLE PROGRESS	**—**	**100%**	**41.6%**	**Weighted multi-temporal evidence summation**


3. SATELLITE OPTICAL EVIDENCE & CHANGE MASK OVERLAYS

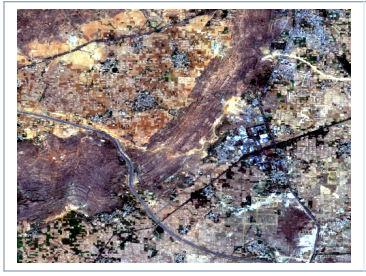


T0 Baseline (2019)
NDVI 0.187 • Natural



T1 Earthworks (2021)
NDVI 0.262 • Clearing



T2 Post-Stage (2023)
NDVI 0.346 • Surfaced

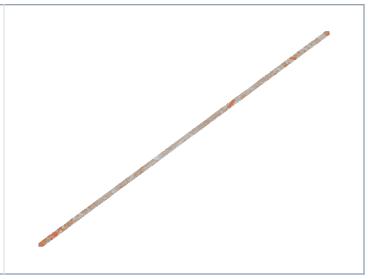

Corridor Change Mask
19.6% Chainage Disturbed

4. METHODOLOGY & SENSOR PROVENANCE

Sensor Specification: European Space Agency (ESA) Sentinel-2 L2A bottom-of-atmosphere reflectance. **Spectral Bands:** B02 (490 nm), B03 (560 nm), B04 (665 nm), B08 (842 nm) at 10m nominal spatial resolution. **Corridor Masking:** 50m lateral Right-of-Way buffer reprojected into UTM Zone 43N. All calculations isolate corridor pixels from background regional crop/seasonal noise.

5. EVIDENTIARY LIMITATIONS & DISCLAIMER

Important Notice: Satellite observations quantify measurable multispectral surface reflectance and vegetation changes over time. Observable Progress provides objective risk screening and schedule consistency assessment; it does not independently establish legal proof of contractual completion, material thickness, or financial fraud. Findings are designed for human-in-the-loop decision support to prioritize

targeted on-site engineering inspections.